

Duo Mini

Installation Instructions for DUO Mini in Drywall


ARON™
Light Delivered™

PLEASE READ ALL INSTRUCTIONS CAREFULLY BEFORE INSTALLING. RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. ALL INSTALLS SHOULD BE IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. ALL WIRES AND MATERIALS USED FOR INPUT/OUTPUT MUST BE UL APPROVED.


Opening Dimensions

Product	Opening Length (X)	Opening Width (Y)
DuoD1-6.75	6.38	6.0"
DuoD1-9.75	9.38"	6.0"
DuoD1-11.75	12.38"	6.0"


Installation Steps

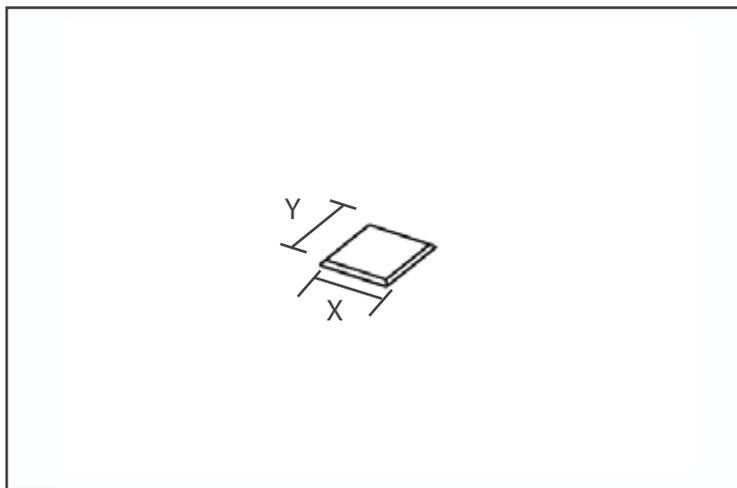


- 1 Cut hole in ceiling according to measurements in table.

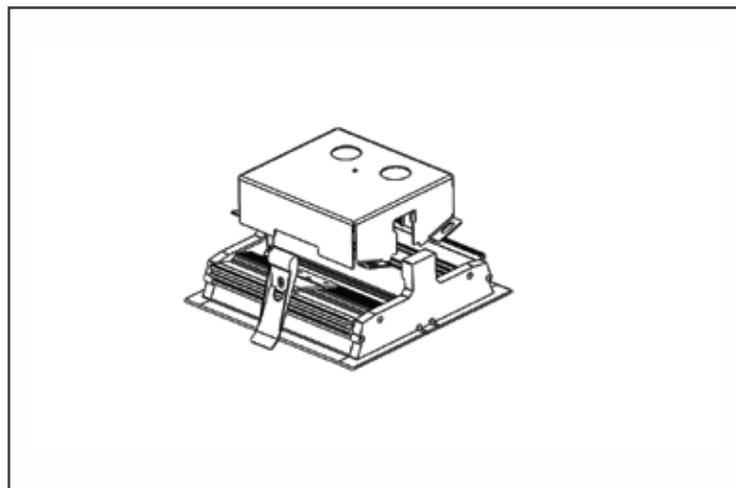

- 2 Complete all electrical wiring with the fixture still below the ceiling. Remove the top cover to access wiring by removing 4 screws. Reinstall the wiring cover box back in place when finished.

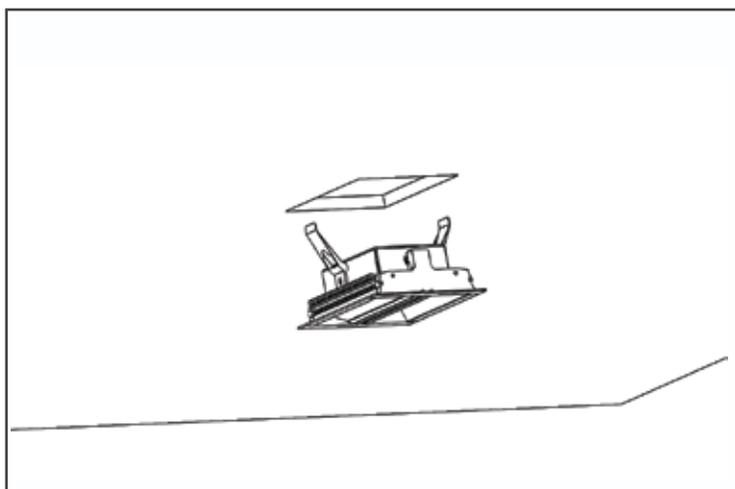

- 3 Bend both springs upward at the same time and install the fixture into the ceiling

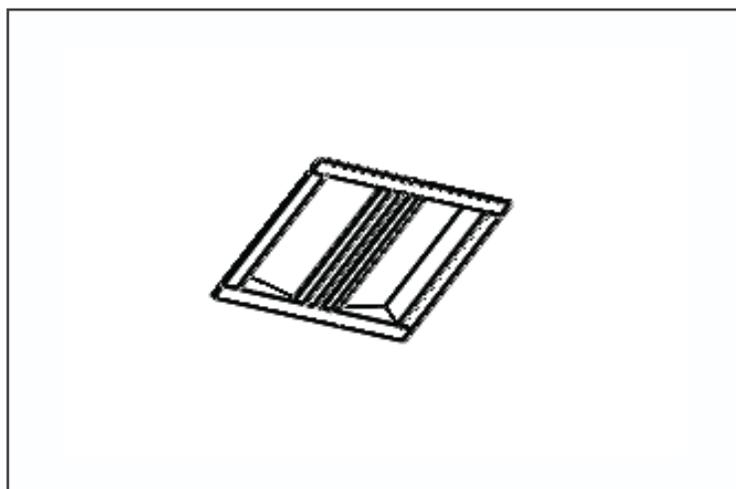

- 4 If applicable, snap the plastic cover into the center channel by squeezing the tabs, inserting at one end, and pushing it on throughout the length of the fixture