


DUO T-BAR - Slim

ARON™
Light Delivered™

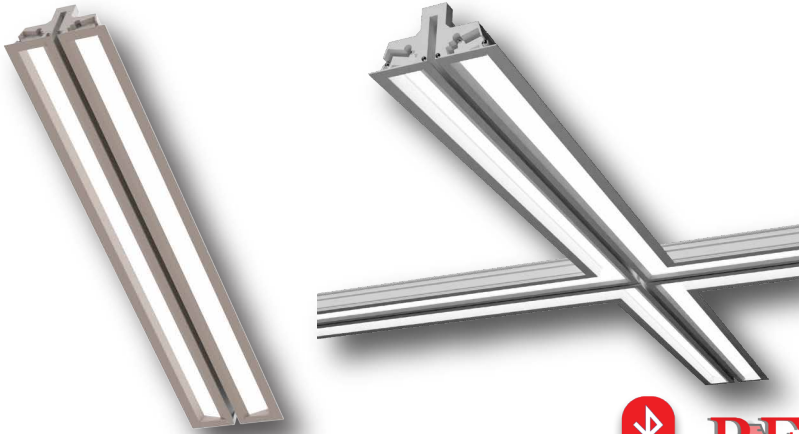

Important Ordering Notes:

For Armstrong FASTSIZED Tile Program - please coordinate with your Armstrong Regional Representative



Project: _____

Type: _____

Notes: _____

DUO T-Bar Slim, recessed fixture. Designed with an edge-lit optical system for low glare, high efficacy levels, and perfected beam performance. The DUO T-Bar Slim simplifies installation by sitting directly on the main or cross T Bars of any existing or new grid system. With a depth of just 2.5" and a 4" emitting area, the DUO Slim creates comfortable illumination with architectural appeal.

5 Year Warranty

Patent - U.S. Patent No. 10,808,896

Ordering Guide

DUOT2									
ARON ID		CEILING TYPE		LENGTH		LUMENS/FT		BEAM	
DUOT2	DUOT TBar - Slim	F	TGrid 9/16" & 15/16"	2FA	23.75"	250	250 lm/ft	B2	Wide
				3FA	35.75"	500	500 lm/ft		
				4FA	47.75"	750	750 lm/ft		
				5FA	59.75"	1000	1000 lm/ft		
				6FA	71.75"	1250	1250 lm/ft		
				7FA	83.75"	1500	1250 lm/ft		
				8FA	95.75"				
				C	Continuous Run: Up to 32' *1ft Increments				
		4x4X	4x4 Cross						
				4x8X	4x8 Cross				
						**Consult factory for custom lumen packages			

		UNV									
COLOR / CRI		VOLTAGE		DRIVER		ACCESSORIES		FINISH		RATINGS	
30K8	3000K - 80CRI	UNV	120-277V	DM	Factory 0-10V, Dim 1%	E10W	10W EM Battery	W	White	CCEA	Chicago Plenum
30K9	3000K - 90CRI	347	347 V	DALI	Dali System	CCEA	Chicago Plenum	BLK	Black		Rated
35K8	3500K - 80CRI	POE	Low Voltage	DMX	DMX System			C	Custom		
35K9	3500K - 90CRI		PoE	BT	Bluetooth Control	AWN	Athena Wireless Node RF Only				
40K8	4000K - 80CRI			LD2	Lutron DALI-2	AWNS	Athena Wireless Node with Sensors				
40K9	4000K - 90CRI			LDE1	Lutron EcoSystem (1% Dimming)						
TW	Tunable White			PEQ0	Lutron EcoSystem (0.1% Dimming)						
**TW requires compatible driver systems: DALI,DMX,LT				**See Page 3 for Bluetooth Information. Consult Factory		**Integral battery with remote test button		**Contact factory for custom color			

**Contact Factory For other EM Options

ARON Lighting reserves the right to make any design changes for continuous improvement which will not affect the overall appearance, performance or pricing.

Page 1/4


8/5/2024

Designed and Manufactured in the USA

2022 ARON Lighting
aronlighting.com
484.681.5687

ARON

Optical Performance

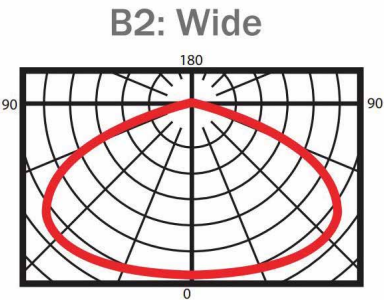


Lumens	Watts	Efficacy (lm/W)
2000	17.3	115.6
2500	22.0	113.3
3000	26.8	111.8
4000	32.4	123.4
5000	40.8	122.6
6000	49.1	122.1
8000	68.0	117.5
10000	84.3	118.6
12000	103.8	115.6

*All values at 3500K


Application Sizes

**Fixture Can be Installed on Main or Cross TBars

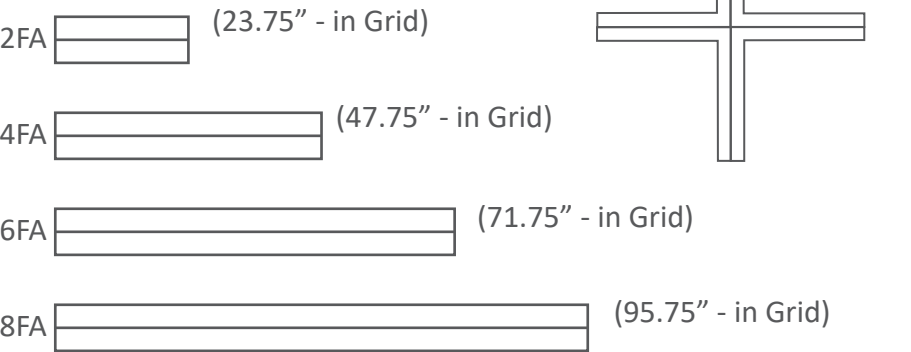

For continuous run contact factory

Dimensions

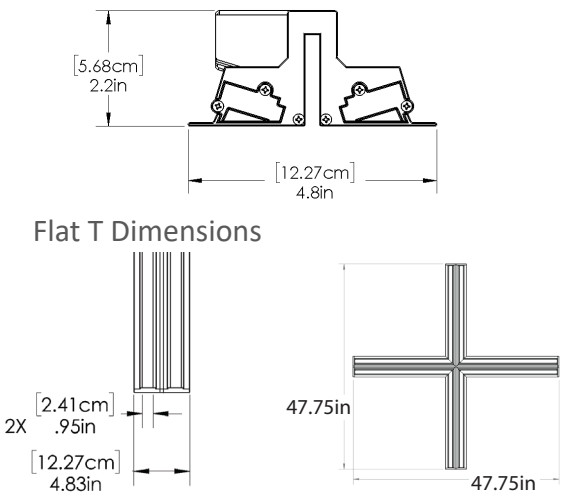

Construction

- Extruded aluminum housing
- Injection molded ABS end caps
- Powder coated paint
- Galvanized sheet metal components
- Mate with 15/16, 9/16 Flat TBars

Optical

- Choice of 3 beam distributions
- Cast acrylic light guide
- Extruded volumetric diffuser
- Minimum 80 or 90 CRI
- 3000K, 3500K, 4000K
- ≤ 3 SDCM

Electrical

- Integral high efficiency driver
- 0-10V dimming (1%) standard
- Class 2
- Optional battery pack
- Add-on sensor ready (consult factory on sensor technologies)

Weight

- 2FA = 5.2 lbs
- 4FA = 9.1 lbs
- 6FA = 13 lbs
- 8FA = 16.9 lbs

DUO T-BAR - Slim

ARON™

Standard Mounting


2FA on 2x2 or 2x4 grid
4FA on 2x4 grid (4' span)

Contact your local Armstrong Representative for Made to Order Tiles


***Note for 6FA and 8FA Fixtures**

Coordinate lighting fixture installation with ceiling contractor, refer to install instructions for clarification


****Fixture Can be Installed on Main or Cross TBars**

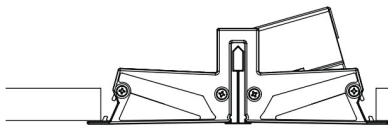

9/16" Flat T-Bar

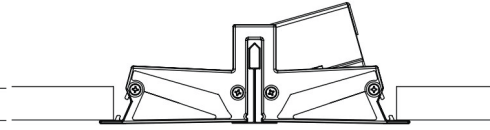


15/16" Flat T-Bar

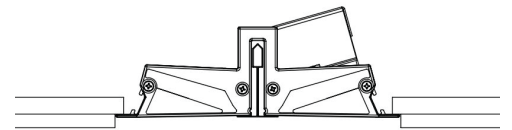


9/16" or 15/16" Flat T-Bar with Tegular Tiles

Mounting With Intersecting Cross-T

4FA, 6FA, 8FA on 2x2 grid
4FA on 2x4 grid (2' span)
6FA, 8FA on 2x4 grid




9/16" Flat Cross T-Bar



15/16" Flat Cross T-Bar


Mounting With DUO Cross

2x2 Grid Installation

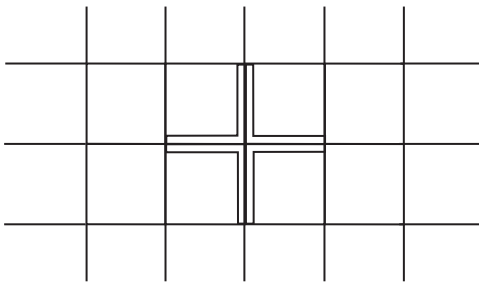

2x4 Grid Installation

Notched Extrusion
for TBar Supports

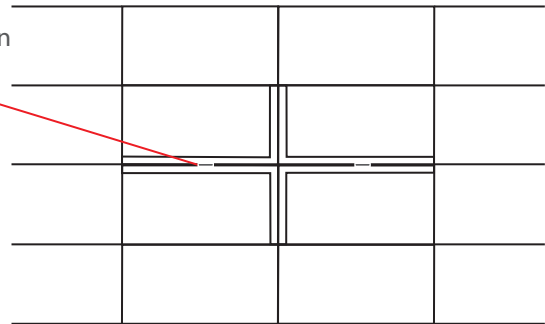

Comes as 4x4X with (QTY: 2) 2FT Fixtures
To Be Joined To Cross in Field.

***Custom Cross-Ts also available through Armstrong for quicker and seamless installation.**

Bluetooth Technology



With our BubblyNet OEM partnership, realize the power of bluetooth lighting control! Offering wall controllers, integrated fixture sensors, tunable white/ rgbw control. Contact Factory for More Information



PoE Technology

NuLEDs
Lighting Over IP®



smartengine | wtec

Our Partnership with WTEC and NuLEDs offer PoE Integration using low voltage cat 5, cat 6 cabling. Contact Factory For more Information.

Contact factory for compatibility of other PoE manufacturers

ARON Lighting reserves the right to make any design changes for continuous improvement which will not affect the overall appearance, performance or pricing.

Page 3/4

8/5/2024


Designed and Manufactured in the USA

2022 ARON Lighting
aronlighting.com
484.681.5687

ARON

Model Tested: DuoT2-4FA-1500-B2-4000K-80-UNV-DM

Photometric Curve

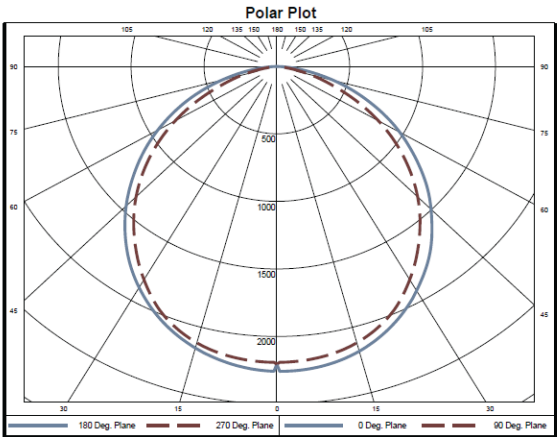

Candela Distribution

Zone	Lumens	% of Luminaire
0-40	2789	47.6%
0-60	4811	82.2%
0-90	5856	100.0%
90-180	0	0.0%

Luminance Data (cd/m²)

Average Luminance (cd/m²)			
Horizontal Angle (Degrees)			
Vertical Angle (Degrees)	0	45	90
0	19390	19390	19390
45	18600	17350	16980
55	17660	15850	15340
65	16360	13690	12510
75	13940	9745	8307
85	9365	3322	2368

Length: 4ft
Lumens/ft: 1500
Total Lumens: 6000
Input Watts: 49.1 W
Efficacy: 122.1 lm/W

Zonal Lumens

Zonal Lumen Summary								
Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire
0-5	52.6	0.9%	60-65	371.6	6.3%	120-125	0	0.0%
5-10	156.3	2.7%	65-70	289.3	4.9%	125-130	0	0.0%
10-15	254.9	4.4%	70-75	202.6	3.5%	130-135	0	0.0%
15-20	344.9	5.9%	75-80	120.9	2.1%	135-140	0	0.0%
20-25	422.3	7.2%	80-85	50.3	0.9%	140-145	0	0.0%
25-30	483.4	8.3%	85-90	9.6	0.2%	145-150	0	0.0%
30-35	525.8	9.0%	90-95	0	0.0%	150-155	0	0.0%
35-40	548.6	9.4%	95-100	0	0.0%	155-160	0	0.0%
40-45	551.2	9.4%	100-105	0	0.0%	160-165	0	0.0%
45-50	533.5	9.1%	105-110	0	0.0%	165-170	0	0.0%
50-55	496.3	8.5%	110-115	0	0.0%	170-175	0	0.0%
55-60	441.6	7.5%	115-120	0	0.0%	175-180	0	0.0%