



Edge 2"

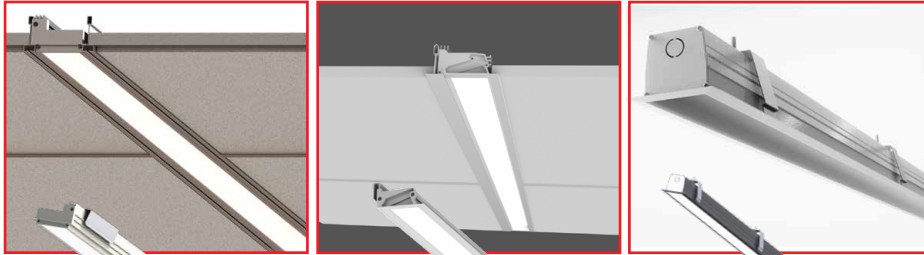

Symmetric - Grid



Wall Wash - Grid



Symmetric - Gypsum



Project: _____

Type: _____

Notes: _____

EDGE, recessed luminaire. With a leading edge optical system and ultra shallow form factor, the Edge luminaire combines both form and function to deliver the perfect beam of light. No longer is plenum space a concern, with a max height of 3.8" and a minimum of 2.1" the Edge can be simply installed into any grid or drywall ceiling systems in varying lengths and patterns.

Ordering Guide

EDGET1									
ARON ID		CEILING TYPE		MOUNTING OPTIONS		LENGTH		LUMENS/FT	
EDGET1	EDGE 2.0	FF	Flat 9/16" & 15/16" Tbars Flat Ceiling Panel	RTB	Recessed - TBar	2FA	2FT	300	300 lm/ft @ 2.9 W/FT
		FT15	Flat 15/16" Tbars Tegular Ceiling Panel	RDWT	Recessed - Drywall - Trim	3FA	3FT	400	400 lm/ft @ 4.3 W/FT
		FT9	Flat 9/16" Tbars Tegular Ceiling Panel			4FA	4FT	500	500 lm/ft @ 5.1 W/FT
		SS	Dimensional 9/16" Tbars			5FA	5FT	750	750 lm/ft @ 7.1 W/FT
		DW	Drywall			6FA	6FT	850	850 lm/ft @ 8.9 W/FT
						7FA	7FT	1000	1000 lm/ft @ 9.7 W/FT
						8FA	8FT		
						X	2'x2', 4'x4', 2'x4'...		
						C	Continuous Run: *1ft Increments ** Contact Factory for Lengths to the Inch		
						*For Corners or U Shapes, Specify L for Corner, U for U shapes		*Consult Factory for Other Lumen Packages *Wattage Calculated w/ CCT of 35K8	


				UNV					
BEAM		COLOR / CRI		VOLTAGE		DRIVER		ACCESSORIES/RATINGS	
B1	Symmetric	30K8	3000K - 80CRI	UNV	120-277V	DM	Factory 0-10V, Dim 1%	E5W	5W EM Battery
B2	Asymmetric	30K9	3000K - 90CRI	347	347 V	BT	Bluetooth	E10W	10W EM Battery
WW	Wall Wash *WW Available in any length In-Grid -or- 8FT Max Length in Drywall with Flange Kit.	35K8	3500K - 80CRI	POE	Low Voltage PoE	DALI	Dali System	CCEA	Chicago Plenum Rated
		35K9	3500K - 90CRI			ELD	EldoLED .1% Dimming *contact factory for other driver, dimming and control options		
		40K8	4000K - 80CRI						
		40K9	4000K - 90CRI						
		TW	Tunable White 2700-5000K						
						**See Page 5 for Bluetooth Information. Consult Factory			

Edge 2"




Dimensions

Recessed Grid Mounting

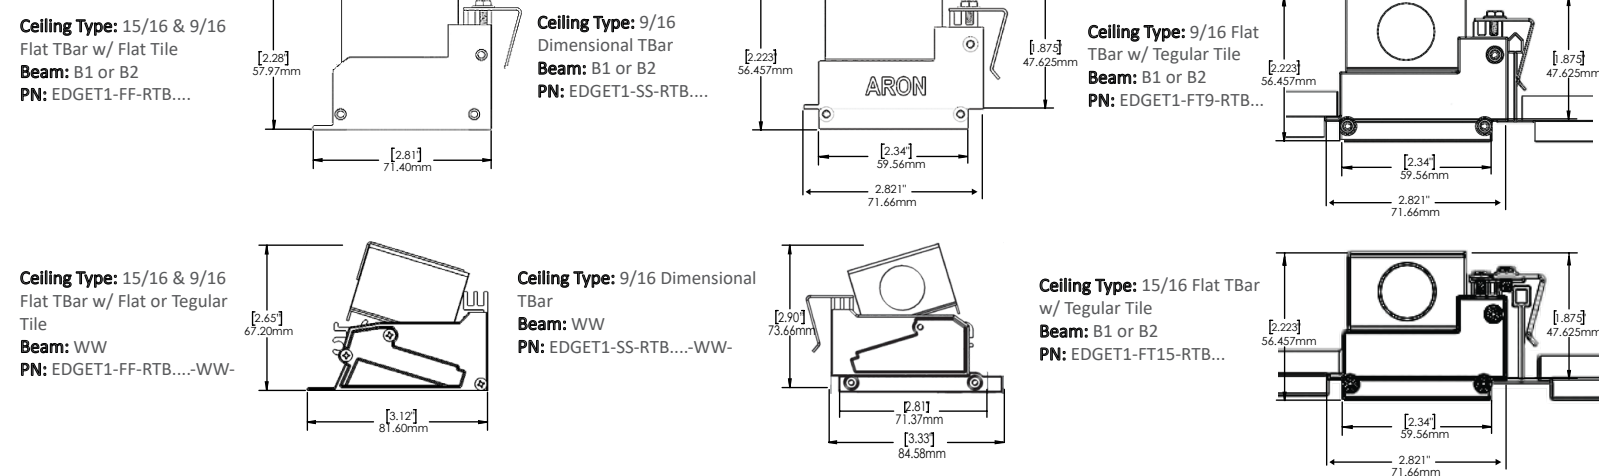

Application Sizes **Contact Factory For Multi-Directional Shapes (Available in Drywall)

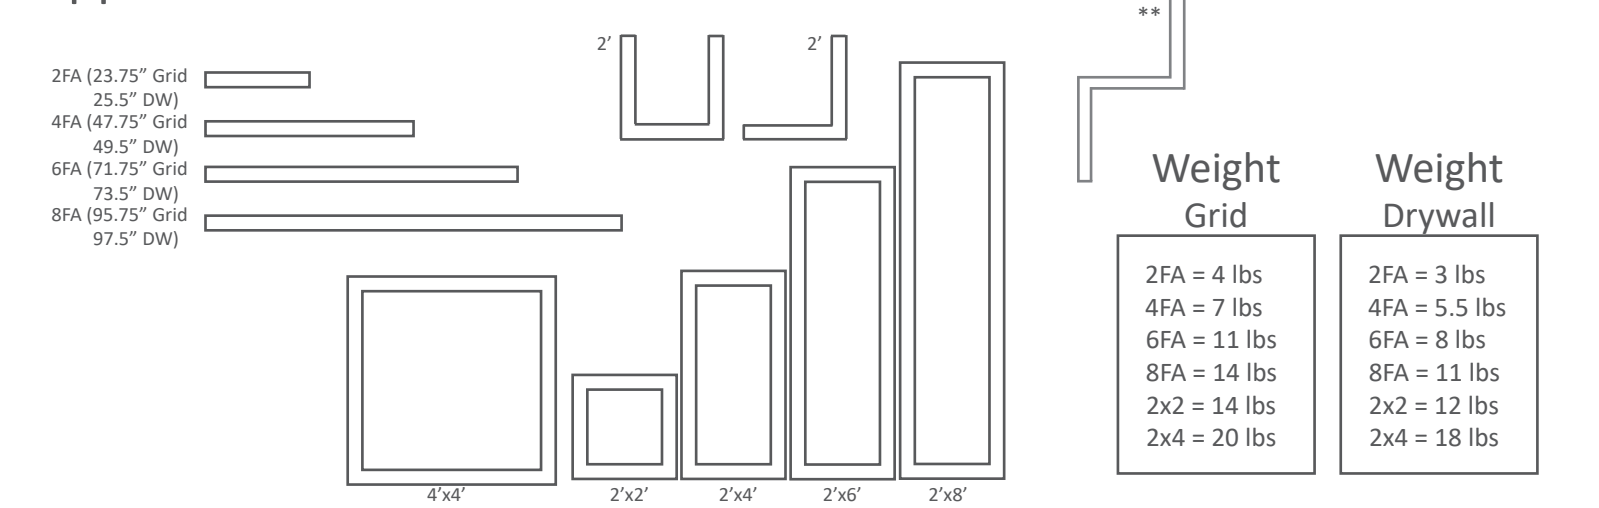


Construction		Optical
EDGE Grid	EDGE Drywall	<ul style="list-style-type: none">- Symmetric and Asymmetric- Edge-Lit Optical System consisting of:<ul style="list-style-type: none">1) Matte White Reflector2) Cast acrylic light guide3) Extruded volumetric diffuser- Minimum 80 or 90 CRI- 3000K, 3500K, 4000K- ≤ 3 SDCM
<ul style="list-style-type: none">- Housing: Extruded aluminum- End Cap: Injection molded ABS- Paint: Powder Coated- Sheet Metal: Galvanized 18 gauge	<ul style="list-style-type: none">- Housing: Extruded aluminum- End Cap Trim: Die Cast Aluminum- Paint: Powder Coated- Sheet Metal: Galvanized 18 gauge- Mounting Bracketry: Annealed Spring Steel	


Mounting Options/Ceiling Type

15/16 T-Bar


Flat Tile - Flange




Flat Tile - Boxed In




Tegular Tile - Flange




Tegular Tile - Boxed In




WW - Flat Tile - Flange




WW - Flat Tile - Boxed In



WW - Tegular Tile - Flange




WW - Tegular Tile - Boxed In




9/16 T-Bar


Flat Tile - Flange




Flat Tile - Boxed In




Tegular Tile - Flange




Tegular Tile - Boxed In




WW - Flat Tile - Flange




WW - Flat Tile - Boxed In



WW - Tegular Tile - Flange



WW - Tegular Tile - Boxed In



Screw Slot T-Bar


Tegular Tile - Flange



Tegular Tile - Boxed In





WW - Tegular Tile - Flange



Drywall

Trim

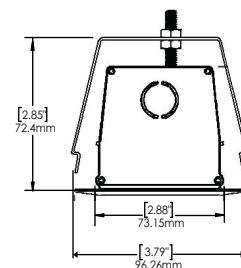

Ceiling Type: Gyp - Trim

Beam: B1 or B2


PN: EDGET1-DW-RDWT....

Electrical


- Integral high efficiency driver w/ universal 120-277 input
- 0-10V dimming (1%) standard
- Class 2
- Optional Integral battery pack
- Tunable White Drivers
- L90: 90,000 Hours
- L70: 185,000 Hours
- Various Control and Driver Options
- *Contact factory

Mechanical Joining

GRID - Guide Pin Alignment and Simple Pull



Drywall - Align and Lock Features




Edge 2"

ARON™

Model Tested: EdgeT1-FF-RTB-4FA-450-B1-35K8-UNV-DM-W

Photometric Curve

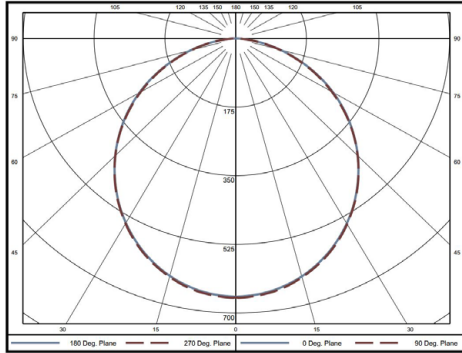

Length: 4ft
Lumens/ft: 453
Total Lumens: 1812
Input Watts: 17.1 W
Efficacy: 105.7 lm/W

Candela Distribution

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	659	659	659	659	659
5	654	656	654	654	657
15	627	629	627	627	630
25	577	579	577	577	580
35	508	508	507	506	509
45	424	422	423	421	423
55	329	326	326	324	326
65	223	222	220	218	219
75	115	115	114	113	113
85	26	26	26	26	26
90	5	4	4	4	4

Zonal Lumens


Zone	Lumens
0-10	62
10-20	177
20-30	266
30-40	318
40-50	326
50-60	291
60-70	218
70-80	121
80-90	32

Luminance Data (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	9691	9665	9678
55	9261	9177	9183
65	8536	8412	8395
75	7216	7135	7075
85	4868	4947	4819

Model Tested: EdgeT1-FF-RTB-4FA-500-WW-35K8-UNV-DM-W

Photometric Curve

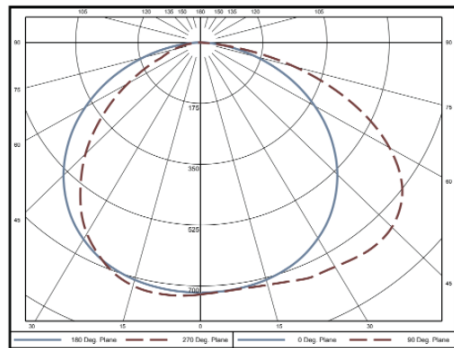

Length: 4ft
Lumens/ft: 592
Total Lumens: 2365
Input Watts: 32.5 W
Efficacy: 105.1 lm/W

L90: 90,000 Hours
L70: 185,000 Hours

Candela Distribution

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	724.2	724.2	724.2	724.2	724.2
5	717.8	725.4	719	719.7	718.9
15	706.4	716.6	713.6	719.9	721.4
25	677.5	700	713.6	736.1	742
35	622.7	667.6	700.3	735.5	753.8
45	540.6	605.3	647.7	718.2	750.8
55	433.1	498	556.4	640.7	678.7
65	304.4	355.3	410.7	480.7	511.1
75	164	197.7	227.5	259	272
85	40.2	45.8	36.9	22.5	16.3
90	0.9	0.8	0.7	0.7	0.7

Zonal Lumens

Zone	Lumens
0-10	69.00
10-20	202.80
20-30	320.60
30-40	404.90
40-50	439.10
50-60	408.60
60-70	310.30
70-80	171.80
80-90	37.30

Luminance Data (cd/m²)


Vertical Angle	Horizontal Angles		
	0	45	90
45	11210	13430	15560
55	11070	14220	17340
65	10560	14240	17730
75	9285	12880	15400
85	6757	6207	2742

Edge 2"

ARON™

Model Tested: EdgeT1-FF-RTB-4FA-850-B1-35K8-UNV-DM-W

Photometric Curve

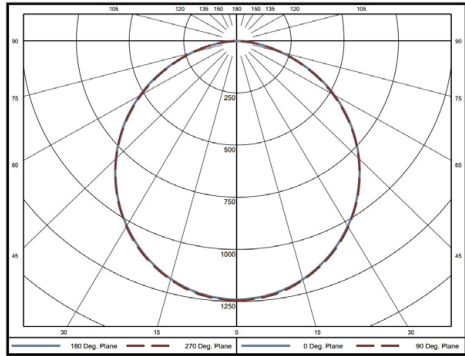

Length: 4ft
Lumens/ft: 855
Total Lumens: 3420
Input Watts: 32.5 W
Efficacy: 105.1 lm/W

Candela Distribution

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	1241	1241	1241	1241	1241
5	1233	1237	1233	1233	1237
15	1183	1186	1181	1182	1186
25	1089	1091	1087	1087	1093
35	959	958	957	955	961
45	801	798	799	795	800
55	622	618	616	613	616
65	423	421	417	415	417
75	217	218	216	215	215
85	47	51	51	51	51
90	2	7	8	8	8

Zonal Lumens

Zone	Lumens
0-10	117
10-20	334
20-30	501
30-40	599
40-50	615
50-60	551
60-70	413
70-80	229
80-90	60

Luminance Data (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	18290	18230	18260
55	17500	17330	17350
65	16150	15920	15910
75	13530	13490	13420
85	8639	9515	9396

Bluetooth Technology



With our BubblyNet OEM partnership, realize the power of bluetooth lighting control! Offering wall controllers, integrated fixture sensors, tunable white/ rgbw control. Contact Factory for More Information



PoE Technology



Our Partnerships with Igor and NuLEDs offer PoE Integration using low voltage cat 5, cat 6 cabling. Contact Factory For more Information.