



Project: \_\_\_\_\_

Type: \_\_\_\_\_

Notes: \_\_\_\_\_


**EZT** | The EZT System, with an extruded three sided acrylic diffusion lens, provides an EZ and versatile way to integrate lines or shapes of light into a Tgrid ceiling. Create unique layouts by forming shapes like squares, rectangles, L's, or straight lengths with no limitation to main or cross tbars as the fixture simply fastens to the bottom of any grid system.

## Ordering Guide

EZTVX							
ARON ID		CEILING TYPE	LENGTH		LUMENS/FT		
EZT1	EZTV1	F9	Flat 9/16" Tbars w/ Flat Accoustical Panel	2FA	2FT	300	300 lm/ft
		F15	Flat 15/16" Tbars w/ Flat Accoustical Panel	4FA	4FT	400	400 lm/ft
		FT9	Flat 9/16" Tbars w/ Tegular Accoustical Panel	6FA	6FT	500	500 lm/ft
		FT15	Flat 15/16" Tbars w/ Tegular Accoustical Panel	8FA	8FT	750	750 lm/ft
		SS	Dimensional 9/16" Bolt Slot Tbars	X	2'x2', 4'x4', 2'x4'...	850	850 lm/ft
		GYP	Surface Mount - Hard Lid Ceiling	C	Continuous Run: *2ft Increments	1000	1000 lm/ft
		*For Corners or U Shapes, Specify L for Corner, U for U shapes (EX. ...2'x2'L...)			*Consult Factory for Other Lumen Packages *Wattage Calculated w/ CCT of 35K8		

				UNV							
BEAM		COLOR / CRI		VOLTAGE		DRIVER		ACCESSORIES/RATINGS		FINISH	
<b>B1</b> <b>WW</b>	Symmetric Wallwash	<b>30K8</b> <b>30K9</b> <b>35K8</b> <b>35K9</b> <b>40K8</b> <b>40K9</b> <b>TW</b>	3000K - 80CRI 3000K - 90CRI 3500K - 80CRI 3500K - 90CRI 4000K - 80CRI 4000K - 90CRI Tunable White	<b>UNV</b> <b>347</b>	120-277V 347 V	<b>DM</b>  <b>BT</b>  <b>ELD</b>	Factory 0-10V, Dim 1% Bluetooth  EldoLED .1% Dimming  *contact factory for other driver, dimming and control options	<b>E5W</b> <b>E10W</b>	5W EM Battery 10W EM Battery	<b>W</b> <b>BLK</b> <b>C</b>	White - Matte Black - Matte Custom
						**See Page 5 for Bluetooth Information. Consult Factory					

## Dimensions

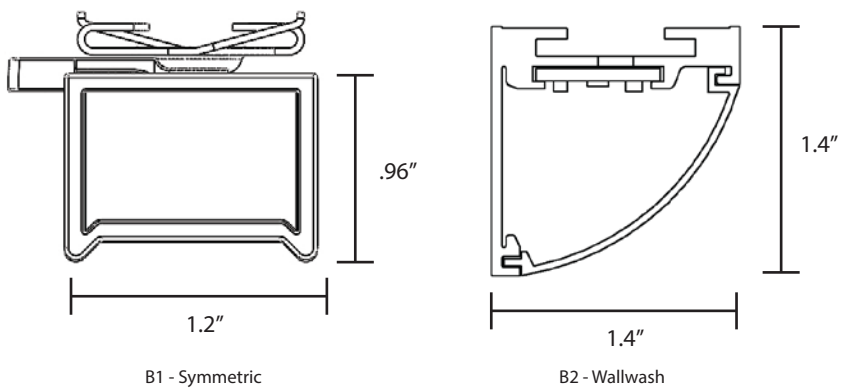


## Continuous Runs & Shapes:

Available at any length, with diffuse joiner for continuous line of light.





## Application Sizes

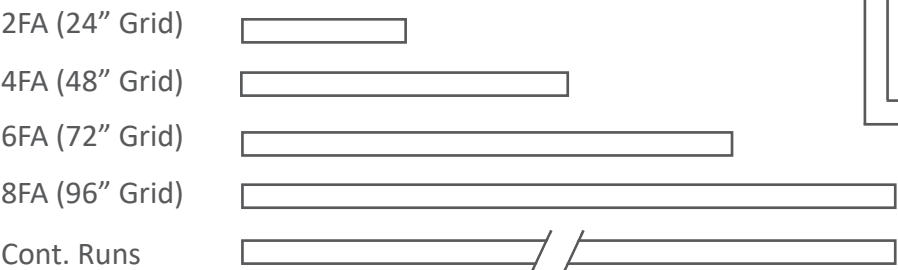

\*Increments to the Inch

MultiDirectional Shapes

\*Contact Factory

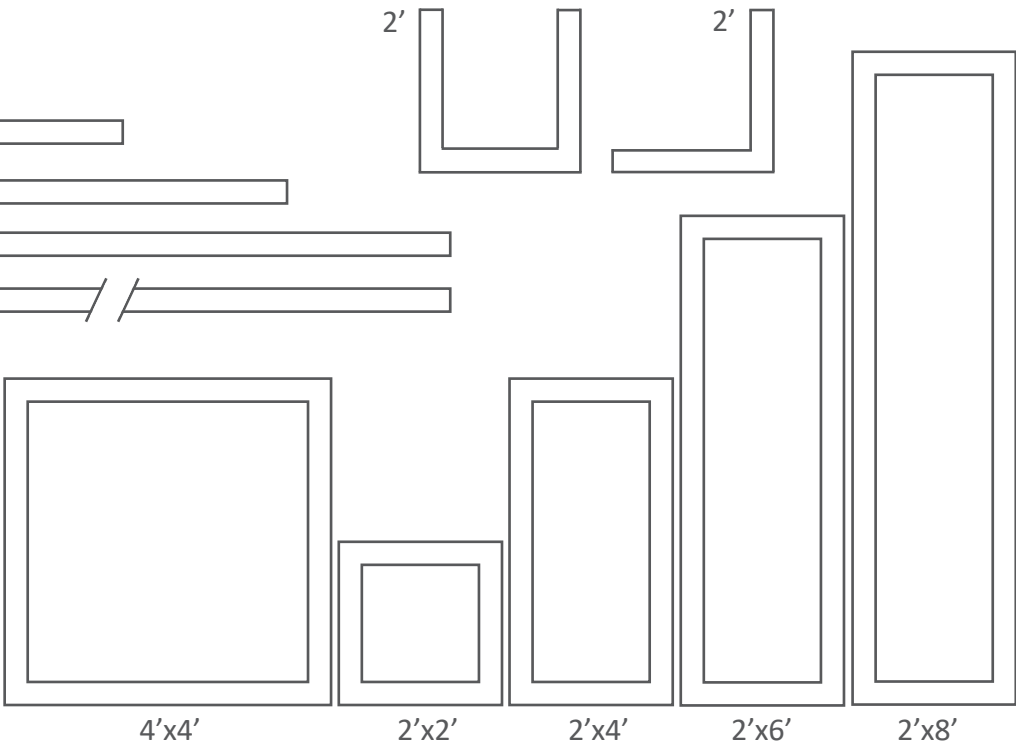

## Construction

- Lens: Extruded Volumetric Diffusion Lens
- End Cap: Die Cast Aluminum
- Fixture Housing: Extruded Aluminum, powder coated
- Sheet Metal: Galvanized 18 gauge remote driver box
- Mounting: TGrid Sheet Metal Clip or Drywall Anchors w/ Sheet Metal Attachment Plate
- Joiner: Volumetric Injection Molded Diffuse Material


## Optical

- Symmetric Lambertian Distribution
- Extruded Volumetric Diffusion
- Minimum 80 or 90 CRI
- 3000K, 3500K, 4000K
- ≤ 3 SDCM

## Mounting:


F15 - Flat 15/16" Tbars w/  
Flat Accoustical Panel

Caddy clip shown for 15/16th grid




FT15 - Flat 15/16" Tbars w/  
Tegular Accoustical Panel


Caddy clip shown for 15/16th grid



GYP - Surface Mount - Hard  
Lid Ceiling

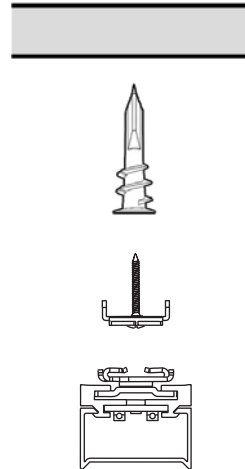

SS - Dimensional 9/16" Bolt  
Slot Tbars

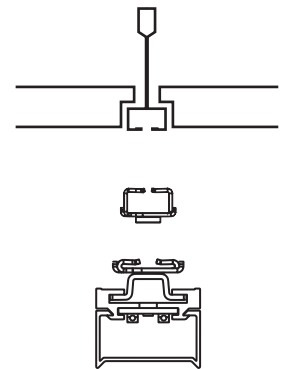

## Electrical

- Remote high efficiency driver w/ universal 120-277 input
- 0-10V dimming (1%) standard
- Class 2
- Optional Integral battery pack
- L90: 90,000 Hours
- L70: 185,000 Hours
- Various Control and Driver Options
- \*Contact factory


## Mechanical Joining

- Simple Mechanical Joining for Continuous Runs & Illuminated Mitered Corners




## Remote Kit Options

**LOW PROFILE REMOTE DRIVER BOX**  
**MAX DRIVER SIZE 25W**

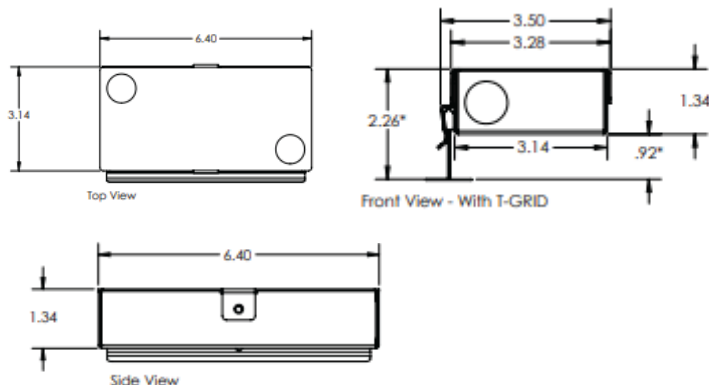


**STANDARD REMOTE DRIVER BOX**  
**MAX DRIVER SIZE 95W**

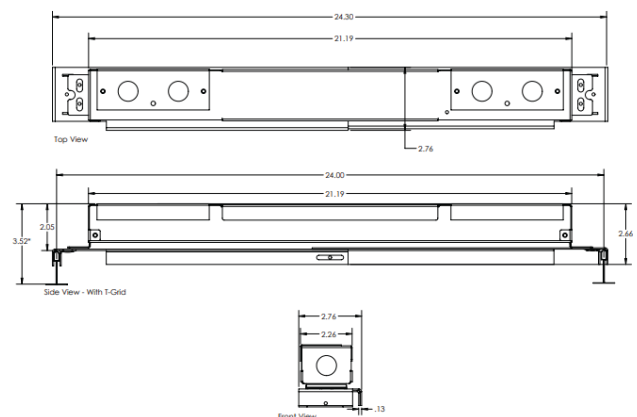

## Model Tested: EZT-FT15-4FA-1000-B1-35K8-UNV-DM-W

### Photometric Curve

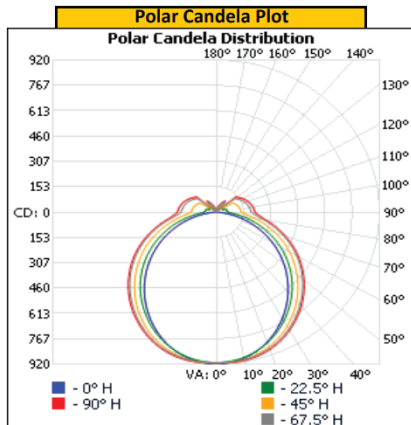

### Candela Distribution

LUMINOUS INTENSITY SUMMARY (candela)

Angle (°)	0	22.5	45	67.5	90
0	913	913	913	913	913
5	915	906	914	911	914
10	898	894	906	908	912
15	872	872	890	896	903
20	837	842	867	877	885
25	794	805	836	850	859
30	745	762	798	817	826
35	690	713	754	778	788
40	630	661	705	734	745
45	567	605	652	686	698
50	502	545	595	634	647
55	434	482	535	580	592
60	364	417	475	521	534
65	292	349	412	460	474
70	219	282	347	397	411
75	150	215	283	334	349
80	83	152	223	274	290
85	29	99	171	225	243
90	0	67	142	198	220
95	0	64	138	193	213
100	0	62	134	188	207
105	0	59	129	181	199
110	0	46	124	172	189
115	0	38	117	162	179
120	0	45	110	152	167
125	0	40	36	140	154
130	0	34	31	42	141
135	0	29	69	20	18
140	0	25	58	80	16
145	0	21	46	72	78
150	0	16	37	58	66
155	0	12	29	44	52
160	0	8	21	28	39
165	0	0	13	19	24
170	0	0	4	9	11
175	0	0	0	0	0
180	0	0	0	0	0

Entire luminous intensity matrix found in .IES file

### Zonal Lumens

### Luminance Data (cd/m²)

Zone	Lumens	Luminaire
0-30	719.2	20.5%
0-40	1,186.0	33.8%
0-60	2,154.6	61.3%
60-90	859.7	24.5%
70-100	599.3	17.1%
90-120	362.0	10.3%
0-90	3,014.3	85.8%
90-180	499.5	14.2%
0-180	3,513.8	100.0%

### Wattage/ft

Lumens/ft	Watts/ft
300	2.37W
400	3.16W
500	3.95W
750	5.92W
850	6.71W
1000	7.89W

Length: 4ft

Lumens/ft: 878.5

Total Lumens: 3513.8

Input Watts: 27.74 W

Efficacy: 126.7 lm/W