


# FLOW

**ARON™**  
Light Delivered™

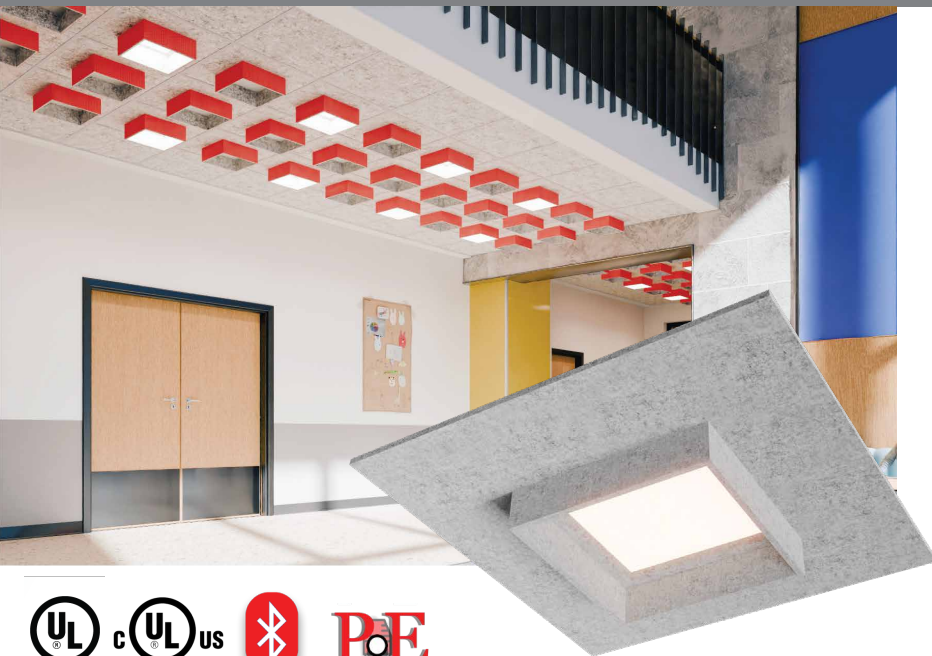

Project: \_\_\_\_\_

Type: \_\_\_\_\_

Notes: \_\_\_\_\_

**FLOW** | Flow was designed to create an interaction between the person and their environment. Simply by changing their orientation in the grid, you can create an unlimited variety of patterns.

Now seamlessly integrate beautiful coordinated lighting into FLOW.



## Ordering Guide

FLDFLW		CEILING TYPE		BLADE DEPTH		LUMENS		BEAM	
ARON ID									
FLDFLW	FLD FLOW	<b>G</b>	Grid - 15/16", 9/16", SS	<b>2</b>	2.4in tall	<b>300</b>	300 lm	<b>B1</b>	Standard
		<b>CG15</b>	Concealed - 15/16"	<b>3</b>	3.3in tall	<b>400</b>	400 lm	<b>B2</b>	Regressed
		<b>CG9</b>	Concealed - 9/16"	<b>4</b>	4.2in tall	<b>500</b>	500 lm	*Only available in square lens shape	
				<b>CUS</b>	Custom	<b>750</b>	750 lm		
						<b>850</b>	850 lm		
						<b>1000</b>	1000 lm		
						<b>1500</b>	1500 lm		
						*1000lm and 1500lm are only available in 8in lens size			
						*Consult Factory for Other Lumen Packages			
						*Wattage Calculated w/ CCT of 35K8			

COLOR / CRI		VOLTAGE		DRIVER		ACCESSORIES/RATINGS		TILE CAP COLOR		TILE BLADE COLOR	
<b>30K8</b>	3000K - 80CRI	<b>UNV</b>	120-277V	<b>DM</b>	Factory 0-10V, Dim 1%	<b>E5W</b>	5W EM Battery	<b>####</b>	Specify Acoustic Tile Color Code (FACT Design)	<b>####</b>	Specify Acoustic Tile Color Code (FACT Design)
<b>30K9</b>	3000K - 90CRI	<b>347</b>	347 V	<b>BT</b>	Bluetooth	<b>E10W</b>	10W EM Battery				
<b>35K8</b>	3500K - 80CRI			<b>ELD</b>	EldoLED .1% Dimming						
<b>35K9</b>	3500K - 90CRI				*contact factory for other driver, dimming and control options						
<b>40K8</b>	4000K - 80CRI										
<b>40K9</b>	4000K - 90CRI										
<b>TW</b>	Tunable White										
<b>RGBW</b>	RGB White										
**TW range 2700K-6500K				**See Page 5 for Bluetooth Information. Consult Factory				**See Page 3		**See Page 3	

ARON Lighting reserves the right to make any design changes for continuous improvement which will not affect the overall appearance, performance or pricing.

Page 1/3




4/21/2025

Designed and Manufactured in the USA

2024 ARON Lighting  
aronlighting.com  
484.681.5687

**ARON**

## Application Sizes

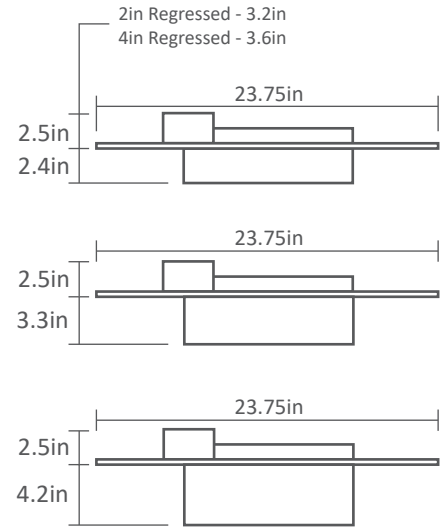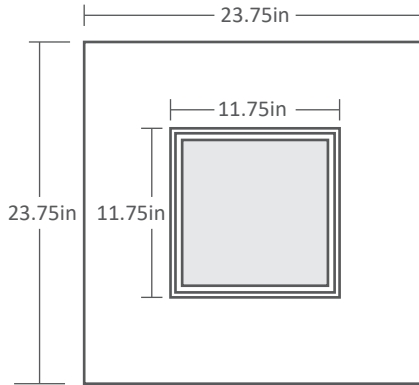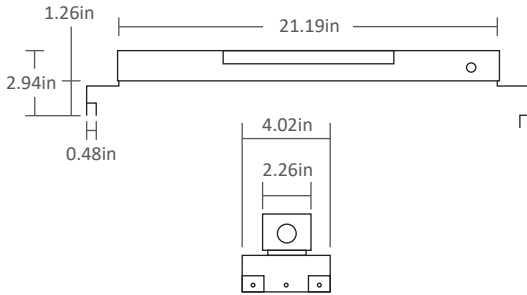

## Lens Shapes

Custom Shape

8" Round

4" Round

8" Square

4" Square



## Construction

- Optic: Edge lit light guide
- Lens: Volumetric Diffusion lens
- Fixture Housing: Galvanized 18 gauge sheet metal
- Acoustical felt tile housing
- Remote Driver Box: Galvanized 18 gauge sheet metal

## Optical

- Lens Aperture Sizes: 2", 4", 8"
- Symmetric Lambertian Distribution
- Extruded Volumetric Diffusion
- Minimum 80 or 90 CRI
- 3000K, 3500K, 4000K
- ≤ 3 SDCM

## Electrical

- Remote high efficiency driver w/ universal 120-277 input
- 0-10V dimming (1%) standard
- Class 2
- Optional Remote battery pack
- L90: 90,000 Hours
- L70: 185,000 Hours
- Various Control and Driver Options
- \*Contact factory

## Acoustic Tile Properties

### Material

9mm Polyester (PET) Felt +/- .35"

### Size

2x2: 23.75" x 23.75"

Note: 6" clearance required above grid

### Environmental

60% pre-consumer recycled content

### Flammability

ASTM E84 Class A Certified /  
CAN/ULC-S102.2

### Acoustics

Closed plenum installation


Test method – ASTM E795-16 Type

E-400 Mounting closed tile – NRC 1.0



FACT

### Sound Absorption Report

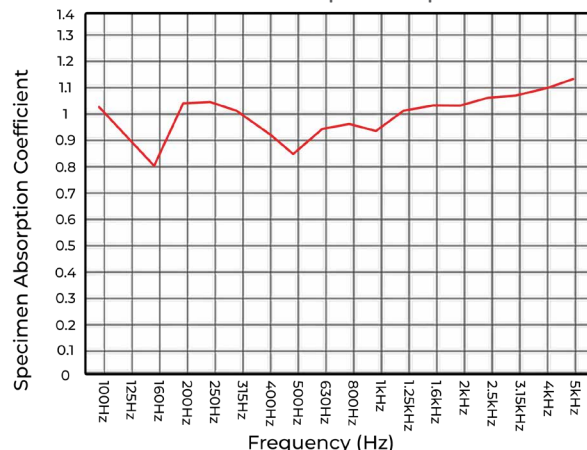


## Acoustic Tile Colors



### Additional Accent Color Options

The following collections from Camira can be used in addition to our standard colors to add accents to your design. Contact us at [samples@fact.design](mailto:samples@fact.design) and we will have the samples sent to you. There is a 20 tile min. per color for this option

For other tile and pattern options, visit [www.fact.design](http://www.fact.design)

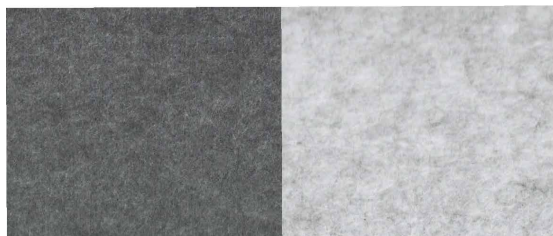

Closeup to show texture

Standard colors shown below

