

LOFT

Installation Instructions for LOFT in T-Grid

ARON™
Light Delivered™

PLEASE READ ALL INSTRUCTIONS CAREFULLY BEFORE INSTALLING. RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. ALL INSTALLS SHOULD BE IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. ALL WIRES AND MATERIALS USED FOR INPUT/OUTPUT MUST BE UL APPROVED.

Fixture Dimensions

Product	Dimensions
LOFT	2x2, 2x4, 1x4

Provided Hardware:
Fixture
Seismic Clips
Safety Wire


Fixture Installation Steps for T-Grid:



1 Remove existing ceiling tile (if tile is currently installed).



2 Drop the Loft fixture into the T Grid in correct orientation.

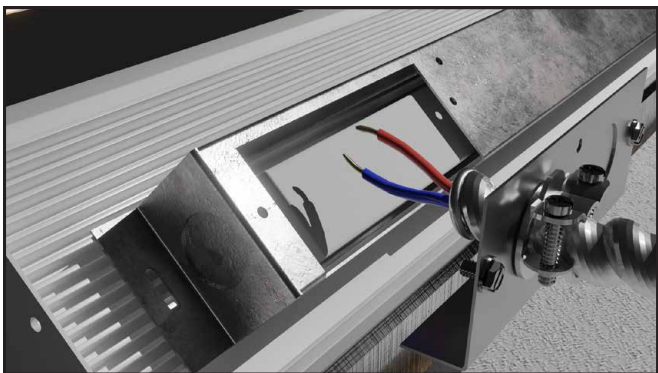

3 Attach external power wires to Driver in Driver Housing.




4 Attach Driver housing cover plate to driver housing.



- 5 Install Seismic clips to left and right T Grid if needed.



- 6 Attach safety wire to Loft fixture and structure if needed.

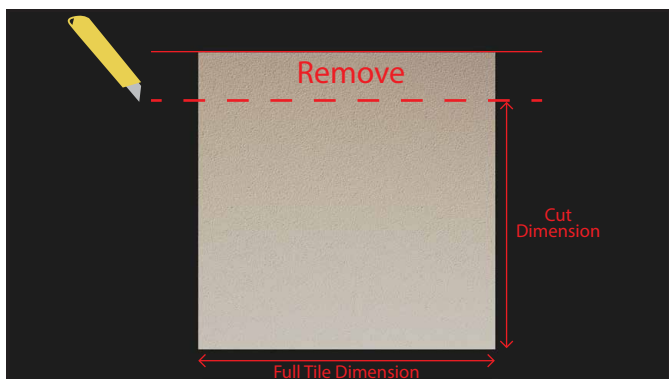

- 7 Cut ceiling tile to (Tegular/Flat):
- a. 2x2 Single Light Engine Fixture: 20.00" x 23 3/4"
 - b. 2x4 fixture: 20.00" x 47 3/4"
 - c. 1x4 fixture: 8 1/4" x 47 3/4"
 - d. 2x2 Dual Light Engine Fixture: 15 1/2" x 23 3/4"
 - e. 2x4 Dual Light Engine Fixture: 15 1/2" x 47 3/4"



- 8 Place the ceiling tile on the top of the fixture to complete installation.