

# LOFT



Project: \_\_\_\_\_  
 \_\_\_\_\_  
 Type: \_\_\_\_\_  
 \_\_\_\_\_  
 Notes: \_\_\_\_\_  
 \_\_\_\_\_

**LOFT** | LOFT is an innovative edge lit architectural luminaire that drops directly into a 9/16 or 15/16 T Grid ceiling. The appearance of the fixture's angles create a dynamic ceiling environment which enhances the aesthetic appearance of the space. LOFT comes in a 2x2, 2x4 and 1x4 configuration.



## Ordering Guide



LFT		CEILING TYPE		CEILING PANEL TYPE		CUSTOM ACOUSTIC TILE TYPE		FIXTURE SIZE		LUMENS/FT/SIDE	
<b>LFT</b>	Loft Fixture	<b>TG</b>	T-Grid Ceiling with Panels	<b>ST</b>	Standard Tile (not included)	<b>NA</b>	If no tile is being provided	<b>22FA</b>	2' x 2'	<b>250</b>	250 lm/ft
		<b>DW</b>	Drywall Ceiling	<b>CAT</b>	Custom Acoustical Tile (by FACT Design)	<b>###</b>	See page 3 to specify tile code	<b>24FA</b>	2' x 4'	<b>500</b>	500 lm/ft
								<b>14FA</b>	1' x 4'	<b>750</b>	750 lm/ft
								<b>44FA</b>	4' x 4'	<b>1000</b>	1000 lm/ft
										<b>1250</b>	1250 lm/ft
										<b>1500</b>	1500 lm/ft

\*Consult Factory for Other Lumen Packages  
 \*\*Wattage Calculated w/ CCT of 35K8


LIGHT ENGINE LAYOUT		COLOR/CRI		VOLTAGE		DRIVER		ACCESSORIES		FINISH/COLOR	
<b>B1</b>	1 Light Engine	<b>27K8</b>	2700K - 80CRI	<b>UNV</b>	120-277V	<b>DM</b>	0-10V (1% Dimming)	<b>E10W</b>	10W EM	<b>W</b>	White
<b>B2</b>	2 Light Engine	<b>27K9</b>	2700K - 90CRI	<b>347</b>	347V	<b>BT</b>	Bluetooth	<b>CCEA</b>	Chicago Plenum	<b>BLK</b>	Black
		<b>30K8</b>	3000K - 80CRI	<b>POE</b>	Low Voltage POE	<b>EDL</b>	0.1% Dimming	<b>AWNRR</b>	Athena Wireless Node RF Only	<b>C</b>	Custom
		<b>30K9</b>	3000K - 90CRI			<b>LD2</b>	Lutron DALI-2	<b>AWNS</b>	Athena Wireless Node with Sensors		
		<b>35K8</b>	3500K - 80CRI			<b>LDE1</b>	Lutron EcoSystem (1% Dimming)				
		<b>35K9</b>	3500K - 90CRI			<b>PEQ0</b>	Lutron EcoSystem (0.1% Dimming)				
		<b>40K8</b>	4000K - 80CRI								
		<b>40K9</b>	4000K - 90CRI								
		<b>50K8</b>	5000K - 80CRI								
		<b>50K9</b>	5000K - 90CRI								
		<b>TW</b>	Tunable White (2700K-5000K)								

\*\*See Page 5 for Bluetooth Information. Consult Factory  
 \*\*Contact factory for custom colors


## Application Sizes and Dimensions




2'x2' B1-Single Light Engine

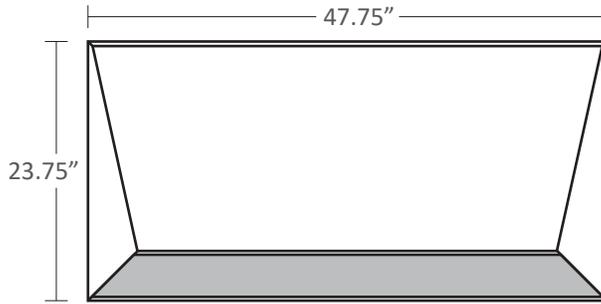


2'x4' B1-Single Light Engine

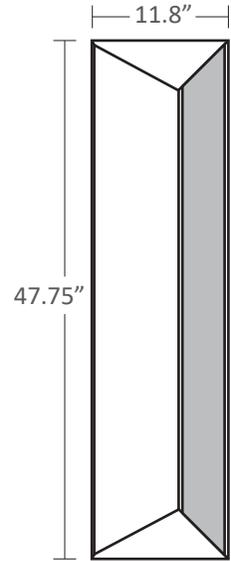


1'x4' B1-Single Light Engine




2'x2' B2-Double Light Engine

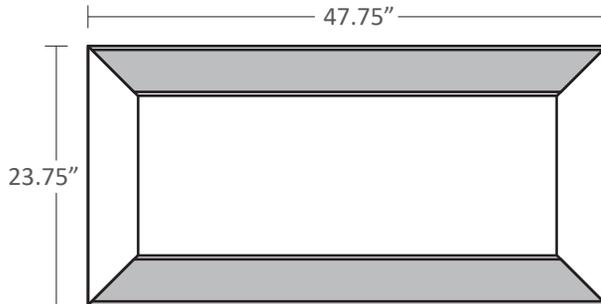

2'x4' B2-Double Light Engine

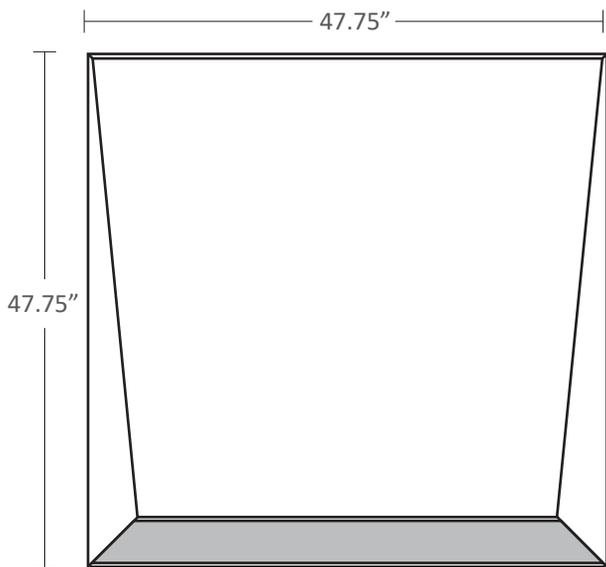

4'x4' B1-Single Light Engine

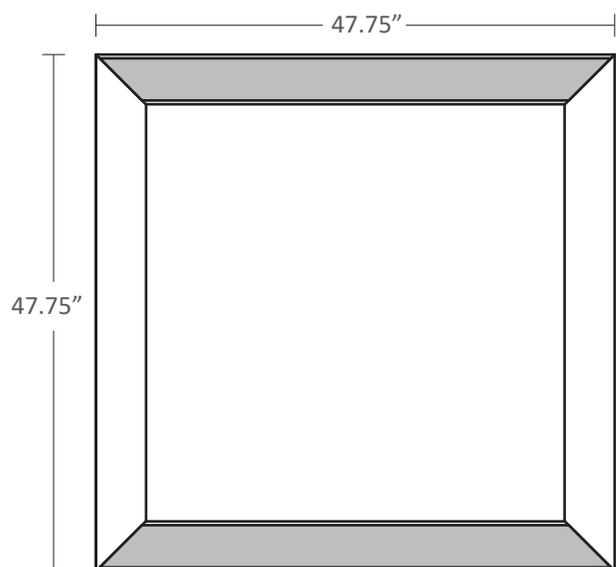

4'x4' B2-Double Light Engine

## Specifications

### Electrical

- Integral class 2 driver with universal 120-277 input.
- 0-10V dimming (1%) standard
- Optional Integral battery pack
- Optional remote EM battery pack

- L90: 90,000 Hours
- L70: 185,000 Hours
- Various Control and Driver Options
- \*Contact factory

### Construction

- Main Light Engine Housing: Extruded Aluminum, Powder Coated
- Fixture Housing: 18 Gauge Sheet Metal, Powder Coated
- Light Guide: 4mm Custom Acrylic Light Guide
- Lenses: 1) Extruded Volumetric Diffusion Optic  
2) Extruded 20 Degree Angled Optic
- Driver Housing: 18 Gauge Sheet Metal

### Optical

- Symmetric Lambertian Distribution (B2)
- Asymmetric 20 Degree Distribution (B1)
- Minimum 80 or 90 CRI
- 2700K, 3000K, 3500K, 4000K, 5000K
- ≤ 3 SDCM

### Mounting

- Fixture arrives fully assembled
- Lays into a 2x2 and 2x4 T-Grid suspended ceiling system.
- Compatible with either 9/16 or 15/16 T Grid.
- Flange kit provided for drywall ceilings.



## Acoustic Tile Colors

### camira

Blazer, Blazer Lite  
www.camirafabrics.com


Popular Colors



### kvadrat

Divina 3, Divina MD, Divina Melange 3  
www.kvadrat.dk/en

Popular Colors



## FACT

### Additional Accent Color Options

The following collections from Kvadrat can be used in addition to our standard colors to add accents to your design. Contact us at [samples@fact.design](mailto:samples@fact.design) and we will have the samples sent to you. There is a 20 tile min. per color for this option

For other tile and pattern options, visit [www.fact.design](http://www.fact.design)

## Commonly Paired FACT Tile Designs




FACT Calm Collection - Branches



FACT Wink 3-Dimensional Tile


Standard colors shown below

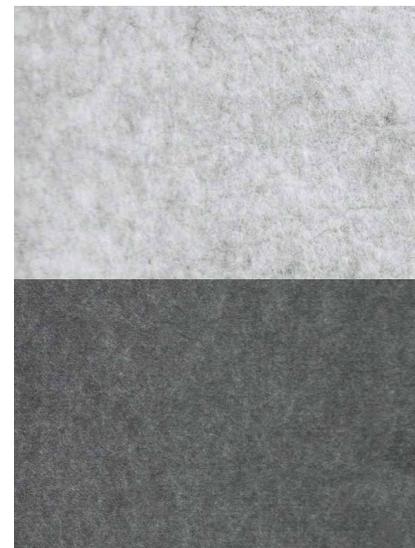

Closeup to show texture

## Model Tested: LFT-TG-ST-NA-22FA-1500-B1-35K8-UNV-DM-W

Photometric Curve

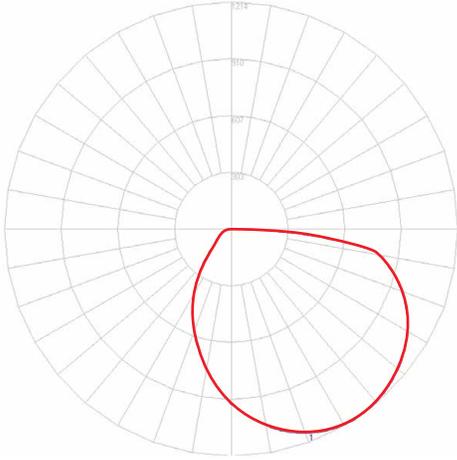

Size: 2x2  
 Lumens/ft: 1530  
 Total Lumens: 3060  
 Input Watts: 27 W  
 Efficacy: 113 lm/W

Zonal Lumen Summary

Zone	Lumens	% of Total	Zone	Lumens
0-20	342.9	11.2	0-10	88.8
0-30	728.6	23.8	10-20	254.2
0-40	1196.5	39.1	20-30	385.7
0-60	2168.3	70.9	30-40	467.9
0-80	2921.1	95.5	40-50	494.7
0-90	3059.9	100.0	50-60	477.1
10-90	2971.1	97.1	60-70	423.4
20-40	853.6	27.9	70-80	329.3
20-50	1348.3	44.1	80-90	138.8
40-70	1395.2	45.6	90-100	0.0
60-80	752.8	24.6	100-110	0.0
70-80	329.3	10.8	110-120	0.0
80-90	138.8	4.5	120-130	0.0
90-110	0.0	0.0	130-140	0.0
90-120	0.0	0.0	140-150	0.0
90-130	0.0	0.0	150-160	0.0
90-150	0.0	0.0	160-170	0.0
90-180	0.0	0.0	170-180	0.0
110-180	0.0	0.0		
<b>Total</b>	<b>3059.88 lm</b>	<b>100%</b>		

Luminance Data (Cd./Sq.M)

Average in Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	4624	3941	2384
55	5418	4403	2256
65	6738	5015	2121
75	9484	6175	1945
85	14677	7425	1359

Wattage/ft

Lumens/ft	Watts/ft
250	2.21W
500	4.42W
750	6.63W
1000	8.84W
1250	11.06W
1500	13.27W