


QUAD TBar


Installation Instructions for Single and Two Quad at Center of Tile

PLEASE READ ALL INSTRUCTIONS CAREFULLY BEFORE INSTALLING. RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. ALL INSTALLS SHOULD BE IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. ALL WIRES AND MATERIALS USED FOR INPUT/OUTPUT MUST BE UL APPROVED.

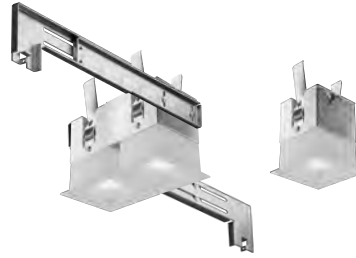


Parts Included by ARON
Two arm supports
Hex Head Screws 5/16" 8-32

Fixture Installation Steps:

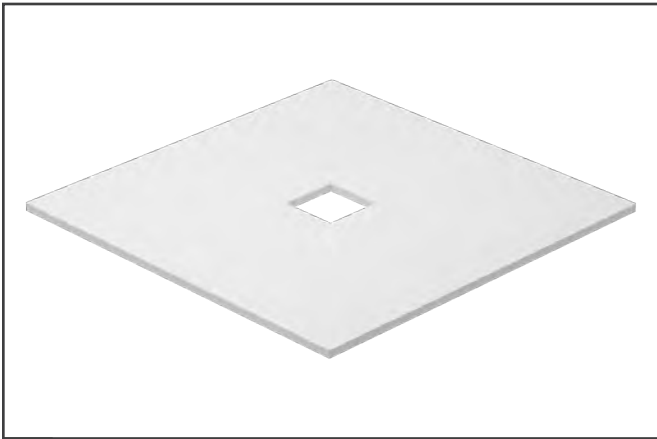


1 Using dimensions provided, create a hole in the desired ceiling panel location.


Cutout dimensions:
Solo: 3.5" x 3.5"
Two Quadrant: 3.5" x 7.3"

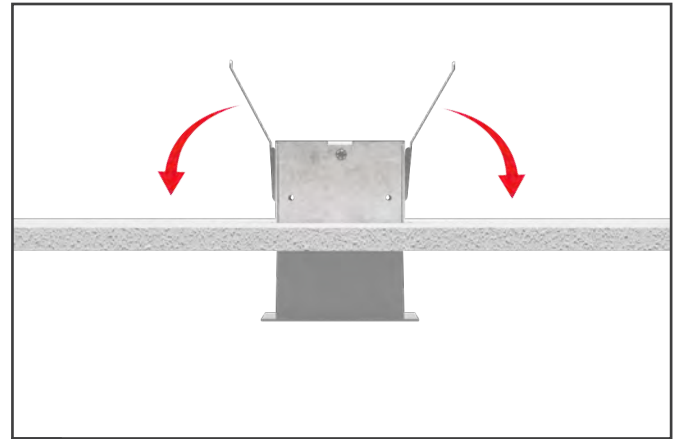


2 After installing the panel into the ceiling grid, insert the fixture through hole cutout and allow spring clips to gently grab the top of the ceiling tile. Ensure the flanges of the fixture are covering any ceiling tile cuts.

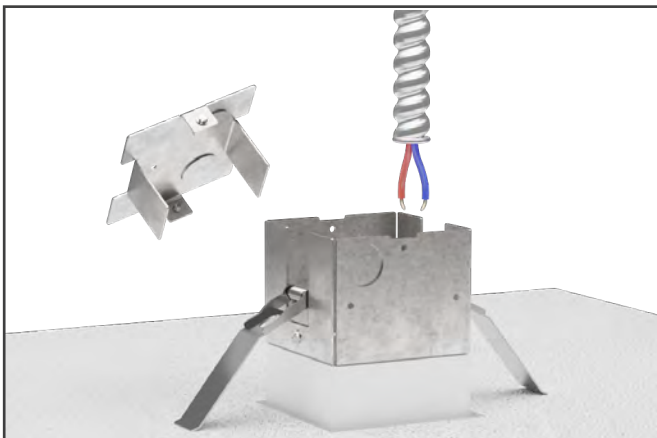

3 Install high voltage by removing the top plate of the driver enclosure.

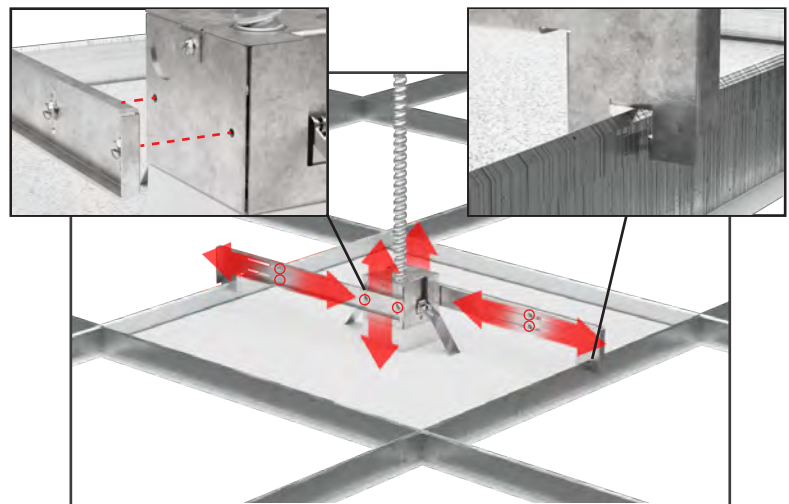

4 Install arm brackets by first sitting them on the t-bar and then screwing the bracket into the side of the fixture. See slot locations above to adjust height and length of arms.

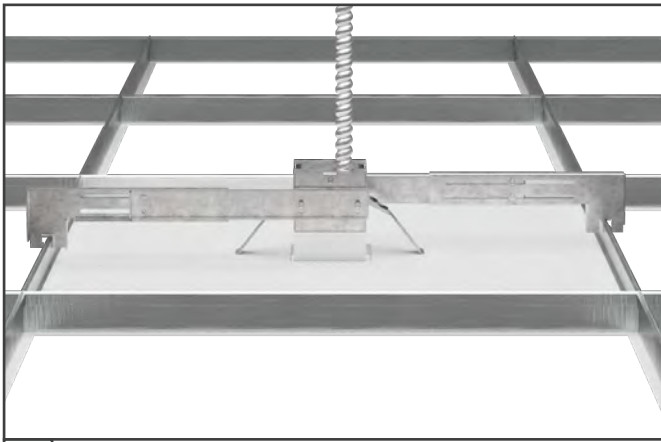

- 7 Inspect fixture to ensure arms are resting on the the top of T-Grid and fixture's flanges are fully covering the hole cut in the tile. Loosen screws to make any adjustments to arm placement if necessary and retighten afterwards. Power on the fixture to ensure it is working properly.