


QUAD TBar


Installation Instructions for 4 Quadrant Configuration

ARON™
Light Delivered™


PLEASE READ ALL INSTRUCTIONS CAREFULLY BEFORE INSTALLING. RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. ALL INSTALLS SHOULD BE IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. ALL WIRES AND MATERIALS USED FOR INPUT/OUTPUT MUST BE UL APPROVED.




Fixture Installation Steps:

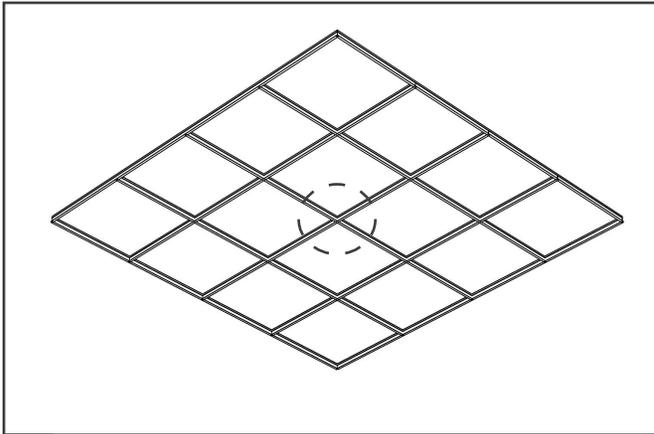


- 1 Prepare for QUAD installation by moving any tie wires away from intersection of grid where QUAD fixture will be installed.

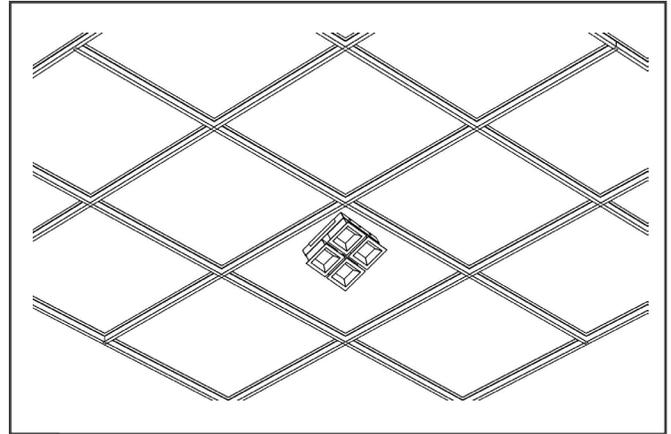


- 2 Insert fixture into ceiling grid.

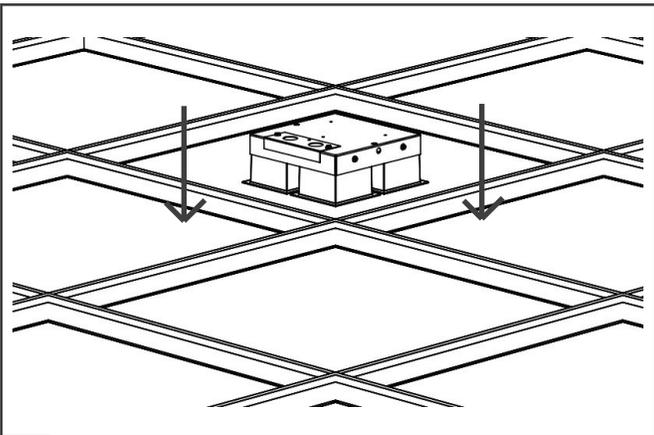


- 3 Lay fixture on the grid at the T-Bar intersection.

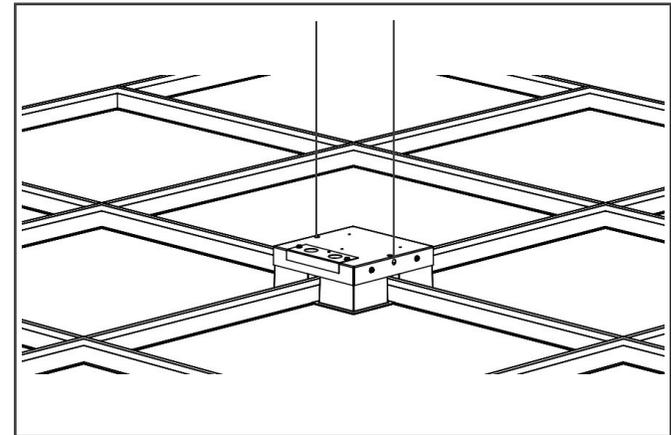

- 4 Tie fixture to deck using tie-up holes on the back of the fixture.

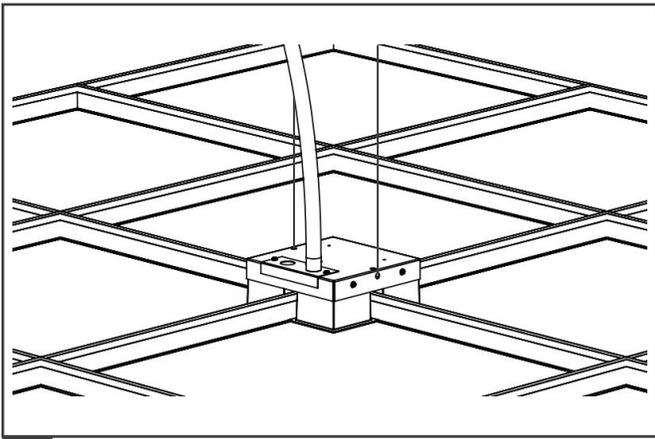


5 Complete electrical connection through fixture Access Plate.

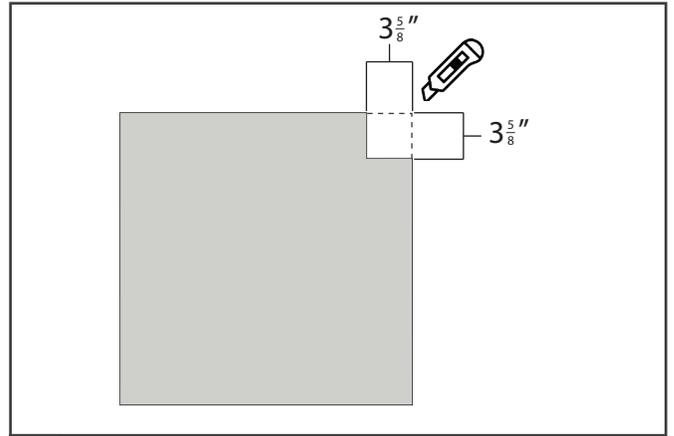

6 Cut 3 5/8" x 3 5/8" notch in ceiling tiles adjacent to fixture.

NOTE: Custom pre-cut ceiling tiles are available through Armstrong. Contact factory for info.

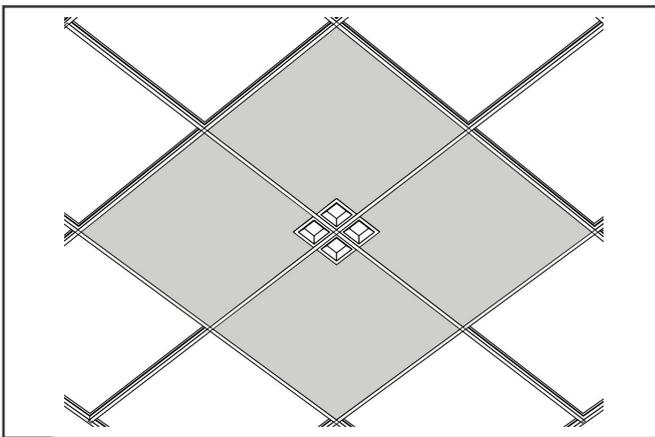

7 Install notched ceiling tiles adjacent to fixture.