
ARON™
Light Redefined

NEW

EDGE
AIR

Where innovation takes shape
in an **ultra-slim, edge-lit form.**

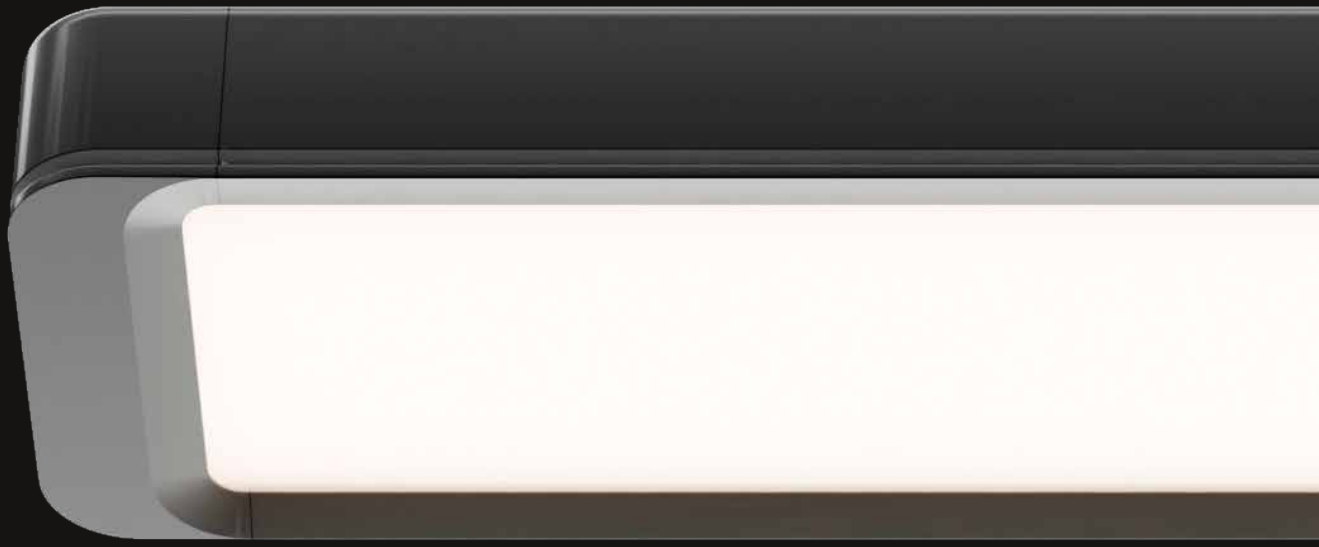

aronlighting.com

Swipe →

PROFILE


1.18"

Just over 1" tall and 2¾" wide, with a 4.5:1 lens-to-bezel ratio. The fixture appears nearly weightless while delivering powerful, even illumination.



ARON
Light Redefined

aronlighting.com

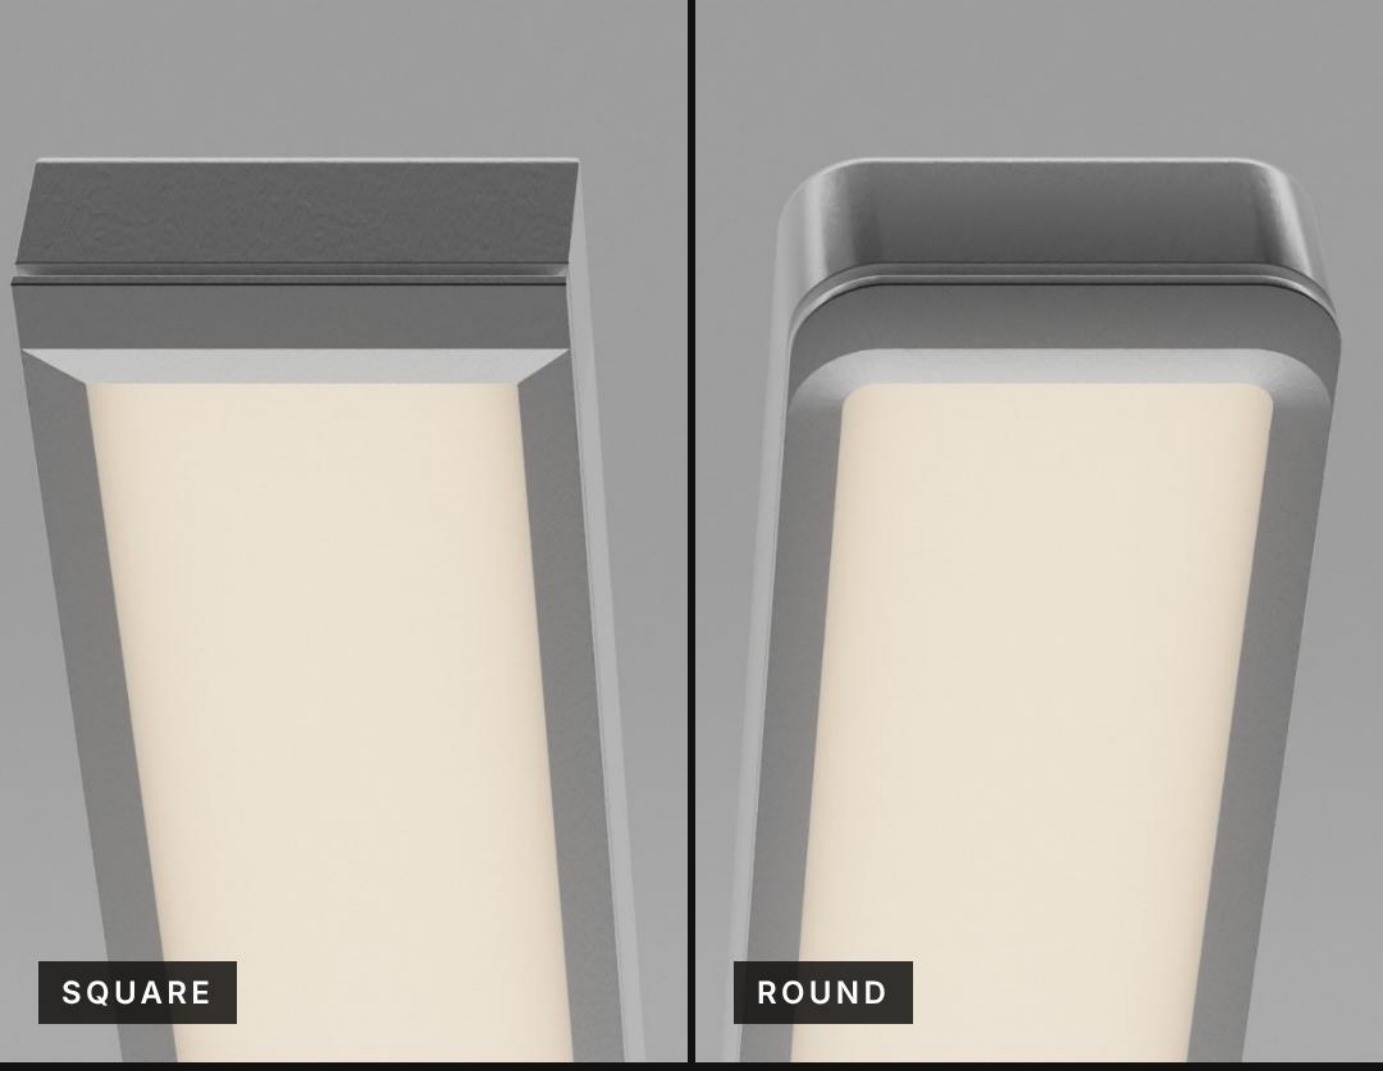

Two End Cap Styles.
One Ultra-Slim Profile.


Edge Air lets designers personalize the look with Square or Rounded end caps. Whether you prefer sharp geometry or soft contours, both options preserve the clean, modern form that defines the Edge Air family.



PERFORMANCE

Direct and Indirect Light, Refined With Purpose.


Edge Air gives designers precise control over illumination. The direct component uses a high-performance edge-lit system for smooth, comfortable downward light, while the indirect component features a wide asymmetric optic that evenly washes the ceiling. Together, they deliver a balanced visual experience and the performance needed for efficient fixture spacing across open offices and collaborative environments.

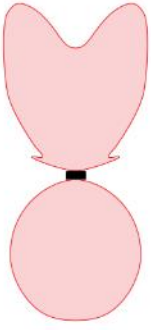

Direct / Indirect



Mostly direct



Mostly indirect



Direct only

ARON Light Redefined

7 up/down distributions · independent control available



Thin can still be powerful.

Edge Air merges ARON’s engineering precision with a distinctly modern aesthetic. Built around a one-inch-thin profile and a high-performance edge-lit optical engine, it delivers bright, even light without the bulk of traditional linear fixtures. The slim geometry reduces visual noise, elevating both the architecture and the environment. True innovation is measured in millimeters.

aronlighting.com

SPECIFICATIONS

EDGE AIR

Profile	1.18" tall × 2.77" wide, 2¼" edge-lit optic
Mounting	Suspended from grid, drywall or open ceiling
Lengths	2–8 ft, or continuous runs in 1 ft increments
End caps	Square or Round
Suspension	24", 48", 60" or 90" adjustable
Output	300 to 1,000 lm/ft
Distribution	100% down, 100% up, or 20/80, 35/65, 50/50, 65/35, 80/20 up/down; independent control optional
Color / CRI	2700K–4000K, 80 or 90 CRI, or tunable white
Electrical	120–277V or 347V, 0–10V dimming to 1%
Options	10W emergency battery, CCEA plenum rating
Finish	White or black; white, black or custom canopy

Specify EDGE AIR on your next project.



ORDERING EXAMPLE

EDGES1-DW-8FA-R-SPF48-500-B3-35K9-UNV-DM-W-5R-W

8 ft, drywall, Round end caps, 48" suspension, 500 lm/ft, 20 up / 80 down, 3500K 90 CRI, white

ARON™
Light Redefined

Ask your ARON rep to see samples
aronlighting.com
484-681-5687

c UL us LISTED · Bluetooth · PoE Enabled · CCEA Approved · BABA COMPLIANT Build America. Buy America Act